

# 972K

Wheel Loader



## Engine

|  |                  |        |
|--|------------------|--------|
| Engine Model                           | Cat® C9.3 ACERT™ |        |
| Max. Net Power (1,800 rpm) – ISO 9249  | 215 kW           | 288 hp |
| Max. Net Power (1,800 rpm) – SAE J1349 | 215 kW           | 288 hp |

## Buckets

|                   |  |  |
|-------------------|--|--|
| Bucket Capacities | 2.9 m <sup>3</sup> -9.9 m <sup>3</sup> | 3.75 yd <sup>3</sup> -13.0 yd <sup>3</sup> |
|-------------------|--|--|

## Weights

|                  |           |           |
|------------------|-----------|-----------|
| Operating Weight | 26 212 kg | 57,770 lb |
|------------------|-----------|-----------|

- For 4.8 m<sup>3</sup> (6.3 yd<sup>3</sup>) general purpose buckets with bolt-on cutting edges.



## 972K Features

### Performance Series Buckets

*With standard Performance Series Buckets, operators benefit from reduced dig times and better material retention; ultimately translating into significant productivity and fuel efficiency improvements.*

### Load Sensing Hydraulics

*Load sensing hydraulics produce flow and pressure for the implement system upon demand and only in amounts necessary to perform the needed work functions, enhancing machine productivity and fuel efficiency.*

### Operator Environment

*The new four post ROPS cab provides enhanced comfort, visibility, and productivity resulting in a more efficient operator. New features include an ergonomic electro-hydraulic (EH) joystick steering system with position control and force feedback (speed sensitive), automatic climate control, viscous mounts to reduce noise and vibration levels, post mounted membrane switches, and a convex windshield giving the operator a panoramic view.*

### Cat® C9.3 ACERT™ Engine

*The innovative Cat C9.3 ACERT engine is optimized for maximum fuel efficiency and increased power density while meeting Tier 4 Interim/Stage IIIB emission standards.*

### Powershift Transmission

*The K Series™ transmissions incorporate a new shifting strategy that delivers smoother shifts, faster acceleration, and increased travel speed when climbing a grade.*

### Fuel Efficiency

*The 972K wheel loader has been integrated as a system; from the linkage and work tool carrying the payload, to the engine, transmission and torque converter moving the machine, the system has been optimized to achieve the lowest cost per ton.*

### Contents

|                                       |    |
|---------------------------------------|----|
| Reliability .....                     | 3  |
| Durability .....                      | 4  |
| Productivity .....                    | 5  |
| Versatility .....                     | 6  |
| Operator Environment .....            | 8  |
| Serviceability .....                  | 10 |
| Sustainability .....                  | 11 |
| Customer Support .....                | 11 |
| Owning Costs .....                    | 12 |
| Operating Costs .....                 | 13 |
| Wheel Loader Specifications .....     | 14 |
| Standard and Optional Equipment ..... | 30 |



**The Cat® 972K was designed to improve operator comfort, performance, and productivity, all while meeting Tier 4 Interim/Stage IIIB emission standards. The Performance Series Buckets enhance visibility and decrease cycle times. The unmatched, revolutionary world-class cab creates a comfortable, efficient, safe, and productive operator environment. The innovative Cat C9.3 ACERT engine is optimized for maximum fuel efficiency and increased power density while meeting Tier 4 Interim/Stage IIIB emission standards. The reliability, durability, and versatility of the 972K result in a machine that is better built to meet your needs. All day. Every day.**

# Reliability

Tested and Proven. Ready to Work.

## Structures

The K Series™ features many of the components designed and proven reliable over generations of product design.

## Strata Precleaner

The system removes 93% of the dust particles before the air has reached the primary engine air filter. As air enters the precleaner, stationary vanes cause the incoming air to spin. The resulting centrifugal force spins dust and dirt to the outer walls where they are ejected out into the exhaust stream, while the clean air flows down the center of the tube and continues into the primary air filter. The primary benefit is extended filter life.

## Cold Start/High Altitude Package

A new optional cold start package includes a fan pump bypass, transmission pump bypass, additional battery capacity, and an engine heater plug/cord. The bypass systems reduce the parasitic load on the engine, while the additional battery capacity increases the cold cranking revolutions during startup. With the new optional cold start package available on K Series, starting capability has been dramatically improved in cold weather conditions. The system also improves starting capability at high altitudes.

## Monitoring Programs

Monitoring product health is key to maintaining reliability of any equipment. Many programs offered by Caterpillar make the tracking of the customer's machine health quick and easy. These programs include Product Link, VisionLink™, and S·O·S<sup>SM</sup> Services.

## Renowned Cat Dealer Support

From helping you choose the right machine to knowledgeable support, Cat dealers provide the best when it comes to sales and service. Manage costs with preventive maintenance programs like Scheduled Oil Sampling (S·O·S<sup>SM</sup>) analysis or elaborate Customer Support Agreements. Stay productive with best-in-class parts availability. Cat dealers can even help you with operator training to help boost your profits. And when it's time for machine rebuild, your Cat dealer can help you save even more with Genuine Cat Reman parts. Receive the same warranty and reliability as new products at cost savings of 40 to 70 percent for power train and hydraulic components.





# Durability

Better Built to Meet Your Needs



## Frames

The robotically welded two-piece structural frame design provides a rugged and reliable foundation for the machine that improves stability, performance, and serviceability. A robust articulating hitch system joins the front and rear frames improving durability. Enhanced lines routings across the hitch joint streamline the manufacturing process and improve reliability and durability.

## Engine

The new Cat C9.3 ACERT engine was designed to optimize power density. It uses a combination of technologies to reduce regulated emissions while ensuring high performance and excellent fuel efficiency. An upgraded ADEM™ 4 electronic control module manages the combustion process and a new high-pressure common rail fuel system allows precise injection timing for a clean, efficient fuel burn. The rugged Cat Clean Emissions Module is securely rubber mounted on its own platform above the engine and contains a Diesel Oxidation Catalyst, Diesel Particulate Filter and Cat Regeneration System. Regeneration, the process by which soot is removed from the Diesel Particulate Filter, is completely automatic and does not interrupt the machine's work cycle.

## Emissions

The 972K features a Cat C9.3 ACERT engine and a Cat Clean Emissions Module to deliver the performance and efficiency that customers demand, while meeting Tier 4 Interim/Stage IIIB emission standards. The six-cylinder electronic engine is turbocharged and aftercooled. ACERT™ Technology is a combination of building blocks that includes electronics, fuel systems, air management systems and aftertreatment components. The system is optimized based on engine size, the type of application and the geographic location in which it will work. The technologies are applied systematically and strategically to meet high customer expectations for productivity, fuel efficiency, reliability and service life.

## Axles

The 972K axles are designed to handle extreme applications resulting in reliable performance and extended life. The front axle is rigidly mounted to the frame in order to withstand internal torque loads and still maintain support for the wheel loader. The rear axle can oscillate to  $\pm 13$  degrees helping to ensure all four wheels stay on the ground providing stability even in the roughest terrain.







# Productivity

Move More. All Day. Every Day.

## Z-bar Linkage

The proven Z-bar linkage with Performance Series Buckets offer excellent penetration into the pile, high breakout forces, good roll back angles, and faster dig times. The results are improved tire life, superior fuel efficiency, and exceptional production capabilities; all helping to enable a sustainable solution for your business.

## Load Sensing Hydraulics

Load sensing hydraulics produce flow and pressure for the implement system upon demand and only in amounts necessary to perform the needed work functions, enhancing machine productivity and fuel efficiency. Implement controllability is improved through simultaneous implement operation and repeatable fine modulation, enabling greater operator comfort through ease of operation.

## Ride Control

Ride control provides the operator with a smoother ride over rough terrain, enabling a more comfortable ride at higher speeds. The benefit is reduced cycle times, higher productivity and better fuel efficiency while performing load and carry applications. The system works by using an accumulator to dampen the linkage motion, acting as a shock absorber.

## Torque Converter

The 972K torque converter has been optimized to improve fuel efficiency and deliver more power to the ground. The 10% increase to rimpull delivers a performance and fuel efficiency boost in all applications.

## Transmission

The K series transmissions incorporate a new shifting strategy that delivers smoother shifts, faster acceleration, and better performance climbing a grade. When placing the transmission into forward gear, the machine will automatically start in second gear. With the further enhancement of a torque based 2 to 1 downshift, the downshift will only occur based on machine load. Owners and operators will fully benefit from utilizing the automatic 1-4 transmission mode, which results in lower fuel consumption and optimal machine performance.

# Versatility

## Work Tool Options to Meet Your Needs



### Work Tools for Many Job Site Requirements

An extensive range of work tools and bucket styles are available for the 972K to customize the machine for your operation. The list includes: Performance Series Buckets; Specialty Buckets (Multipurpose, Side Dump, Waste Handling, Woodchip); Pallet Forks, Log and Lumber Forks, Rakes (with or without top clamps); and Plows (angle or V-style). Each is available either with pin on or quick coupler interface.

### Performance Series Buckets: Load Easy, Fuel Efficient, Carry More

Performance Series Buckets utilize a system-based approach to balance bucket shape with the machine's linkage, weight, lift and tilt capacities. Operators benefit from reduced dig times and better material retention; ultimately translating into significant productivity and fuel efficiency improvements.

### Lower Operating Costs

Performance Series Buckets feature a longer floor that easily digs through the pile and provides excellent visibility for the operators to see when the bucket is full. Less time digging in the pile results in lower fuel consumption and improved tire life. A unique spill guard protects the cab and linkage components from material overflow.

### Higher Productivity

Performance Series Buckets achieve higher fill factors – ranging from 100% to 115% depending on the machine application and material type. The buckets feature optimized geometry with a bucket opening matched to the machine's linkage and incorporate a curved side profile to maximize material retention. The optimized design results in unsurpassed production capabilities.

### Performance Series Bucket Styles

Performance Series Buckets are available for General Purpose, Material Handling, Rock and Coal style buckets.



# Fusion Quick Coupler

## Improved Machine Performance

Fusion™ is the patented wheel loader coupler system from Caterpillar. The Fusion Coupler System provides performance virtually identical to pin on – with all the flexibility of a quick coupler system. The Fusion Coupler sits back, close-in to the loader arms – minimizing offset and increasing the machine's performance.

## No Loss of Performance

Imagine lifting a hundred pound box with your arms fully extended. Now imagine lifting that same load close to your body. That's the genius of Fusion: designed to integrate the work tool and the machine by pulling the coupler and tool closer in to the loader. As a result, the center of gravity is moved inward, towards the machine. This translates to increased lifting ability when compared to machines equipped with other coupler systems.

## Unsurpassed Durability

An advanced wedging mechanism creates a tight, rattle-free fit. This patented lock up system eliminates play and wear – resulting in a long service life. Wedges pull the attachment tight to the machine in two directions – in and down. Constant hydraulic pressure on the coupler wedges compensate for wear, assuring a tight fit through the life of the coupler. Tight fit gives better tool control and increased productivity. Coupler durability is substantially increased over traditional couplers.



## Enhanced Visibility

An open coupler frame design clears sight lines from the operator's seat, making it easier than ever before to engage and disengage attachments with certainty. Offset tines and other design changes to Fusion Pallet Forks, working in conjunction with the Fusion Coupler, enhance visibility substantially at ground level and truck bed height when compared to traditional coupler and fork combinations.

## Common Interface Compatibility

The Fusion Coupler System gives Caterpillar customers one common interface – eliminating the need for many different couplers across the entire range of small and medium wheel loaders. This expanded machine compatibility not only allows one machine to use a range of work tools, but also allows one work tool to be picked up by machines of many different sizes.

The Fusion coupler interface is designed to work on 924 through 972 machines. Each machine will have its own optimal bucket and fork recommendations. However, cross-machine compatibility gives you additional flexibility and fleet options not found with any other wheel loader coupler.

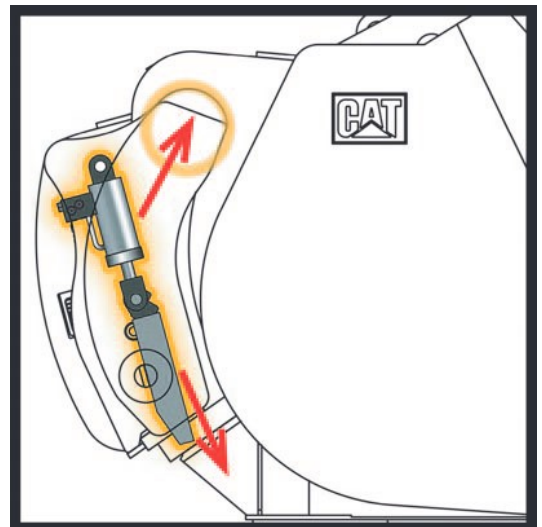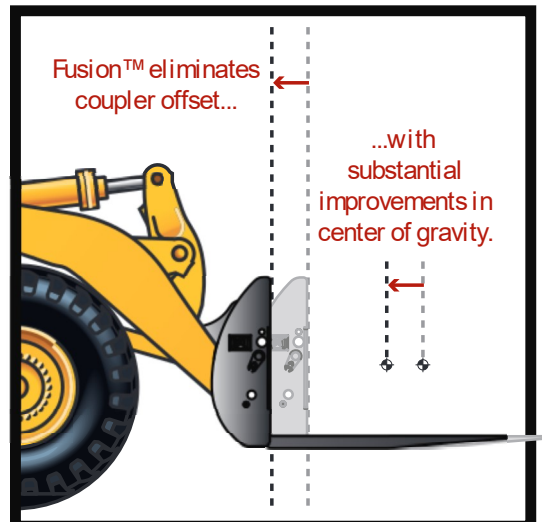

# Operator Environment

Safe. Comfortable. Efficient.



## Electro-Hydraulic (EH) Joystick Steering with Force Feedback (Speed Sensitive)

The industry leading EH joystick steering system combines operator comfort and precision control to provide a sustainable work environment for the operator. The system incorporates a force feedback motor that automatically adjusts the effort needed to tilt the ergonomic joystick based on ground speed, resulting in superior control in all applications and climates. For customers who prefer a steering wheel, an electro-hydraulic steering wheel is available as an option.

## Implement Controls (EH)

Seat mounted single axis implement control levers provide the operator with precise control of the work tool, all while moving with the seat for maximum comfort. In cab programmable kick-outs and automatic cylinder snubbing maximize operator comfort and productivity throughout their shift. Optional implement joysticks are available for 2V and 3V hydraulics.

## Seat

The Cat Optimized Seating System is 6-way adjustable to accommodate operators of all sizes. The seat has a one piece high back that supports the lumbar area of the back up through the shoulders. Both armrests are large and can be adjusted up, down, fore, and aft to enhance comfort and convenience. An optional feature for the cab seat is a heated backrest and cushion.

## Sound and Vibration

New viscous cab mounts connect the cab to the frame of the machine, decreasing noise and vibration the operator is subjected to. This contributes to a well-rested operator, who remains efficient and productive. All Day. Every Day.

## Information Display

The central display panel has a large text box, five analog-like gauges, and LED warning indicators. The large text box provides in-language information about machine operation, feature activation and system troubleshooting and calibration. With the 5 large analog-type gauges the operator can easily identify if key systems are within normal operating range. A resettable trip totals function has been incorporated to display information for average fuel consumed, total fuel consumed, idle fuel, idle time, operating hours, odometer, etc. The navigation buttons are located on the side of the screen and help assist with set up and other various functions.



### Automatic Climate Control and Air Quality

The new climate control system automatically adjusts the air temperature and fan speed to maintain the operator's preferred climate setting. The cab air filtration system recirculates 90% of the cab air and is now serviced from outside the cab, enabling maximum air quality and cab cleanliness. The new air conditioning sealing system keeps refrigerant contained preventing system shutdown. Combined together, the operator remains efficient and productive all shift long due to a sustainable work environment.

### Entry and Exit

Well-placed grab bars and a ladder inclination angle of 10-degrees forward makes the walk into the cab feel more like a staircase than a ladder. The new wider front hinged door can be opened and closed while seated, greatly improving ingress and egress. Two new left-hand and right-hand sliding windows can also be opened and closed with one hand while seated for comfortable communication to personnel on the ground.

### Visibility

Visibility has been enhanced by removing the steering wheel, adding a convex windshield, and eliminating two cab posts. The cab has a clean and clear panoramic view for safe operation of the machine. External rearview mirrors are mounted on the cab to provide all around visibility. The external mirrors fold horizontally to provide fast, safe access to clean the window from the front platform. Optional heated and powered mirrors are available to further improve visibility in cold climates.

### Rearview Camera

With the new standard rearview camera, visibility is greatly enhanced. The camera is located in a pocket on the grill to protect it from damage and the elements. The camera can be set to activate only when the transmission is in reverse to help eliminate distractions in the cab, especially when in dark environments. Two rear work lights are located in the rear grill and can be activated to illuminate the area behind the machine in low light conditions.

### Control Panels and Park Brake Switch

Two control panels located on the front right ROPS post consist of large membrane switches making them easy to activate while wearing gloves. The membrane switches contain LED's to denote activation/mode and have a positive feel and "click" to signal activation. The ISO symbols located on each membrane switch are molded all the way through to ensure the image will not wear off over time. A new "help" feature explains the function of each membrane switch. A two position rocker switch activates the electro-hydraulic park brake and is automatically applied upon machine shutdown.



# Serviceability

Easy to Maintain. Easy to Service.



## Electrical Service Center

The electrical service center provides grouped ground level access to numerous electrical features, enhancing safety and convenience for operators and service technicians. It is conveniently located beneath the left platform for access before entering the cab and contains the maintenance free batteries, a fuse relay panel, main disconnect switch, ground level engine shutdown switch, hood tilt switch, and the jump start receptacle.

## Engine Access

The K Series retains the Cat sloped “one-piece” tilting hood, which has become one of our brand’s hallmarks and provides industry-leading access to the engine, Cat Clean Emissions Module (CEM) and other components but with fresh new styling clearly distinct from the H Series. New to the loaders is a rear clamshell hood design that allows quick access to the engine oil dipstick and fill, fuel fill port, and cooler cores.

## Cooling System

The cooling system is readily accessible for clean out and maintenance. With six cooling fins per inch and a perforated grill, most airborne debris entering the system passes through the cooler cores. The cooler cores swing out providing easy access for cleaning; an option variable pitch fan is available to automatically purge the cooler cores by periodically reversing the airflow.

## Hydraulic Service Center

The hydraulic components are all conveniently located behind the hinged right side access ladder at a single ground level service center enhancing safety and reducing service time. Accessible from the service center are the transmission and hydraulic oil filters, brake accumulators, pressure test ports, etc.



# Sustainability

## Conserving Resources



The 972K is designed to compliment your business plan, reduce emissions and minimize the consumption of natural resources.

- Improved fuel efficiency – less fuel consumed results in lower emissions.
- Machine is built with a 96% recyclability rate (ISO 16714) to conserve valuable natural resources and further enhance machine end-of-life value.
- Engine air filter life doubled to reduce cost and waste.
- Improved operator efficiency through enhanced visibility and reduced noise/vibration levels.
- Product Link family of products and solutions that collect, communicate, store and deliver product and job-site information to maximize productivity and reduce costs.
- Major components are rebuildable, eliminating waste and saving money by giving the machine and/or major components a second – and even third – life.

## Customer Support

Ready to Help. Anytime. Anywhere.

### Machine Selection

Cat dealers are ready to help evaluate machine options; from new or used machine sales, to rental or rebuild options, Cat dealers can provide an optimal solution to meet customer business needs.

### Product Support

Cat dealers are with customers every step of the way to maximize machine uptime by providing unsurpassed worldwide parts support, trained technicians and customer support agreements.

### Operation

To help maximize the return on your investment, Cat dealers offer various training resources to improve operating techniques.

### Financing

Cat dealers offer financing options to meet a variety of customer needs.





# Owning Costs

Proven Best Investment



## Customer Support Agreements

A Customer Support Agreement (CSA) is an arrangement between you and your Cat dealer that helps you lower your total cost per ton. CSAs are flexible, allowing them to be tailored to your business needs. They can range from simple Preventive Maintenance Kits to elaborate Total Cost Performance Guarantees. Having a CSA with your Cat dealer enables more time for you to do what you do best – run your business.

## Monitoring Systems

Monitoring product health is key to optimizing the life of an investment into a Cat Wheel Loader.

- **Cat Product Link** – Cat Product Link allows remote monitoring of equipment to improve overall fleet-management effectiveness. Product Link is deeply integrated into machine systems. Events and diagnostic codes, as well as hours, fuel, idle time and other detailed information are transmitted to a secure web based application, VisionLink™. VisionLink includes powerful tools to convey information to users and dealers, including mapping, working and idle time, fuel level and more.
- **S-O-S<sup>SM</sup> Services** – Helps manage component life and decrease machine downtime, increasing productivity and efficiency. Regular fluid sampling can help track what is going on inside your machine. Wear related problems are predictable and easily repairable. Maintenance can be done to accommodate your schedule, resulting in increased uptime and flexibility in maintenance repairs before failure.

## Parts Availability

Caterpillar provides an unsurpassed level of personalized service to help you work more cost effective and efficient. By utilizing a worldwide parts network Cat dealers help minimize machine downtime and save money by delivering replacement parts within 24 hours.

## Resale Value

Owning quality equipment is an important factor in maintaining resale value. Caterpillar is not only known for machines that are better built, but provides product and dealer support to maintain the reliability and durability of your machine.





# Operating Costs

## Save Time and Money by Working Smart

Data from customer machines show Cat wheel loaders are among the most fuel efficient machines in the industry. Several features contribute to this excellent fuel efficiency:

- **Performance Series Buckets** – Deliver faster fill times and better material retention, ultimately reducing cycle times while improving productivity and fuel efficiency.
- **Load-Sensing Hydraulics** – Provides only the hydraulic flow required by the implement and steering systems for improved fuel efficiency and greater rimpull.
- **ACERT™ Engine** – Power dense engine enables a more fuel-efficient method to meet emissions regulations.
- **Fuel Management System (FMS)** – Optimizes power for maximum fuel savings with minimal impact on production.
- **Engine Idle Shutdown** – Automatic engine and electrical system shutdown conserves fuel.
- **Torque Converter** – Transfers more power to the ground and optimizes fuel efficiency in all applications.
- **Shift Strategy** – Reduced torque interruption increases driveline efficiency, conserving fuel. Auto 1-4 transmission mode keeps engine rpm low, reducing fuel consumption while delivering optimal machine performance.

Machine configuration, operator technique, and job site layout can impact fuel consumption by as much as 30 percent.

- **Machine Configuration** – Select the correct work tool and tire type based on machine application. Radial tires are preferred; ensure proper inflation pressures. Heavier tires burn more fuel. Keep engine rpm low by using auto 1-4 transmission mode.
- **Job Site Layout** – Spot loading targets in the right position. Avoid traveling more than twice the machine length during short cycle loading. Reduce transport distance for load and carry cycles by optimizing job site layout.
- **Loading Bucket** – Load in first gear and keep engine rpm low. Raise and tilt bucket smoothly and do not use a “pumping” motion. Avoid lift lever detent and use of transmission neutralizer.
- **Loading Truck or Hopper** – Do not raise the work tool any higher than necessary. Keep engine rpm low and unload in controlled manner.
- **Idle** – Set the parking brake to engage Engine Idle Management System.

# 972K Wheel Loader Specifications

## Engine

|   |                  |                     |
|---|------------------|---------------------|
| Engine Model                              | Cat® C9.3 ACERT™ |                     |
| Max. Gross Power (1,800 rpm) – SAE J1995  | 237 kW           | 318 hp              |
| Max. Net Power (1,800 rpm) – ISO 9249     | 215 kW           | 288 hp              |
| Max. Net Power (1,800 rpm) – SAE J1349    | 215 kW           | 288 hp              |
| Max. Net Power (1,800 rpm) – EEC 80/1269  | 215 kW           | 288 hp              |
| Peak Gross Torque (1,400 rpm) – SAE J1995 | 1426 N·m         | 1,051 ft-lb         |
| Peak Net Torque (1,400 rpm) – SAE J1349   | 1335 N·m         | 985 ft-lb           |
| Bore                                      | 115 mm           | 4.5 in              |
| Stroke                                    | 149 mm           | 5.9 in              |
| Displacement                              | 9.3 L            | 568 in <sup>3</sup> |

- Cat engine with ACERT™ Technology – meets Tier 4 Interim/Stage IIIB emission standards.

## Weights

|                  |           |           |
|------------------|-----------|-----------|
| Operating Weight | 26 212 kg | 57,770 lb |
|------------------|-----------|-----------|

- For 4.8 m<sup>3</sup> (6.3 yd<sup>3</sup>) general purpose buckets with BOCE.

## Buckets

|                   |  |   |
|-------------------|--|---|
| Bucket Capacities | 2.90 m <sup>3</sup> -<br>9.90 m <sup>3</sup> | 3.75 yd <sup>3</sup> -<br>13.00 yd <sup>3</sup> |
|-------------------|--|---|

- Refer to bucket selection chart.

## Operating Specifications

|   |           |           |
|---|-----------|-----------|
| Static Tipping Load Full 37° Turn – ISO 14397-1*  | 16 317 kg | 35,963 lb |
| Static Tipping Load Full 37° Turn – Rigid Tires** | 17 642 kg | 38,884 lb |
| Breakout Force                                    | 196 kN    | 44,075 lb |

- For 4.8 m<sup>3</sup> (6.3 yd<sup>3</sup>) general purpose buckets with BOCE.
- \* Full compliance to ISO (2007) 14397-1 Sections 1 thru 6, which requires 2% verification between calculations and testing.
- \*\* Compliance to ISO (2007) 14397-1 Sections 1 thru 5.

## Transmission

|           |           |          |
|-----------|-----------|----------|
| Forward 1 | 7.0 km/h  | 4.4 mph  |
| Forward 2 | 12.5 km/h | 7.8 mph  |
| Forward 3 | 21.4 km/h | 13.3 mph |
| Forward 4 | 36.9 km/h | 22.9 mph |
| Reverse 1 | 8.0 km/h  | 5.0 mph  |
| Reverse 2 | 14.3 km/h | 8.9 mph  |
| Reverse 3 | 24.5 km/h | 15.2 mph |
| Reverse 4 | 42.2 km/h | 26.2 mph |

- Maximum travel speed in standard vehicle with empty bucket and standard L3 tires with 826 mm (33 in) roll radius.

## Hydraulic System

|   |              |              |
|---|--------------|--------------|
| Steering System   | Piston       |              |
| Pump Type   |              |              |
| Implement System – Maximum Pump Output (2,275 rpm)        | 340 L/min    | 90 gal/min   |
| Implement System – Maximum Operating Pressure             | 31 000 kPa   | 4,496 psi    |
| Implement System – Optional 3rd Function Maximum Flow     | 300 L/min    | 79.3 gal/min |
| Implement System – Optional 3rd Function Maximum Pressure | 20 700 kPa   | 3,000 psi    |
| Hydraulic Cycle Time – Raise from Carry Position          | 5.9 Seconds  |              |
| Hydraulic Cycle Time – Dump at Maximum Raise              | 2.0 Seconds  |              |
| Hydraulic Cycle Time – Lower, Empty, Float Down           | 2.4 Seconds  |              |
| Hydraulic Cycle Time – Total                              | 10.3 Seconds |              |

- Cycle time with rated payload.

## Brakes

|        |   |
|--------|---|
| Brakes | Meet OSHA, SAE J1473 OCT90 and ISO 3450-1985 required standards |
|--------|---|



## Axles

|                                    |                            |
|------------------------------------|----------------------------|
| Front                              | Fixed                      |
| Rear                               | Oscillating<br>±13 degrees |
| Maximum Single-Wheel Rise and Fall | 495 mm 19.5 in             |

## Tires

- Choose from a variety of tires to match your application.
- Choices include:
  - 26.5R25 VLT BS E3 Radial
  - 26.5R25 VJT BS E3/L3 Radial
  - 26.5R25 VMT BS L3 Radial
  - 26.5-25 SRG LD FS L3 Bias
  - 750/65R25 XLD L3T MX L3 Radial
  - 26.5R25 XHA2 MX L3 Radial
  - 26.5R25 XLD D1 MX L4 Radial
  - 26.5R25 VSNT BS E4/L4 Radial
  - 26.5-25 SDT LD FS L5 Bias
  - 26.5R25 VSDL BS L5 Radial
  - 26.5R25 XLDD2 MX L5 Radial
  - 26.5R25 X MINE D2 MX L5 Radial
  - Cat Flexport™
- NOTE: In certain applications (such as load and carry), the loader's productive capabilities might exceed the tires' tonnes-km/h (ton-mph) capabilities. Caterpillar recommends that you consult a tire supplier to evaluate all conditions before selecting a tire model. Other special tires are available on request.

## Cab

- |           |                             |
|-----------|-----------------------------|
| ROPS/FOPS | Meets SAE and ISO standards |
|-----------|-----------------------------|
- Caterpillar cab with a four post integrated Rollover Protective Structure (ROPS) are standard in North America and Europe.
  - ROPS meets SAE J1040 APR88 and ISO 3471:1994 criteria.
  - Falling Objects Protective Structure (FOPS) meets SAE J231 JAN81 and ISO:1992 Level II criteria.

## Sound

- The sound values indicated below are for specific operating conditions only. Machine and operator sound levels will vary at different engine and/or cooling fan speeds. Hearing protection may be needed when the machine is operated with a cabin that is not properly maintained, or when the doors and/or windows are open for extended periods or in a noisy environment.
- The operator sound pressure level for a standard machine configuration, measured according to the procedures specified in ISO 6396:2008, is 71 dB(A) with the cooling fan speed set at maximum value.
- The machine sound power level for a standard machine configuration, measured according to the procedures specified in ISO 6395:2008, is 111 dB(A) with the cooling fan speed set at maximum value.
- The machine sound pressure level for a standard machine configuration, measured according to the procedures specified in SAE J88:2006, is 76 dB(A). The measurement was conducted under the following conditions: distance of 15 m (49.2 ft), moving forward in an intermediate gear ratio, static hydraulic cycle (with no payload) and with the cooling fan speed set at maximum value.
- The operator sound pressure level for a machine installed with a Low Sound package, measured according to the procedures specified in ISO 6396:2008, is 69 dB(A) with the cooling fan speed set at maximum value.
- The machine sound power level for a machine installed with a Low Sound package, measured according to the procedures specified in ISO 6396:2008, is 108 dB(A) with the cooling fan speed set at maximum value.


## Service Refill Capacities

|  |        |          |
|--|--------|----------|
| Fuel Tank – Standard                   | 381 L  | 101 gal  |
| Cooling System                         | 66 L   | 17.4 gal |
| Crankcase                              | 24.5 L | 6.5 gal  |
| Transmission                           | 50 L   | 13.2 gal |
| Differentials and Final Drives – Front | 64 L   | 16.9 gal |
| Differentials and Final Drives – Rear  | 64 L   | 16.9 gal |
| Hydraulic Tank                         | 198 L  | 52.3 gal |

# 972K Wheel Loader Specifications

## Dimensions

All dimensions are approximate and based on L3 Michelin XHA2 tires.

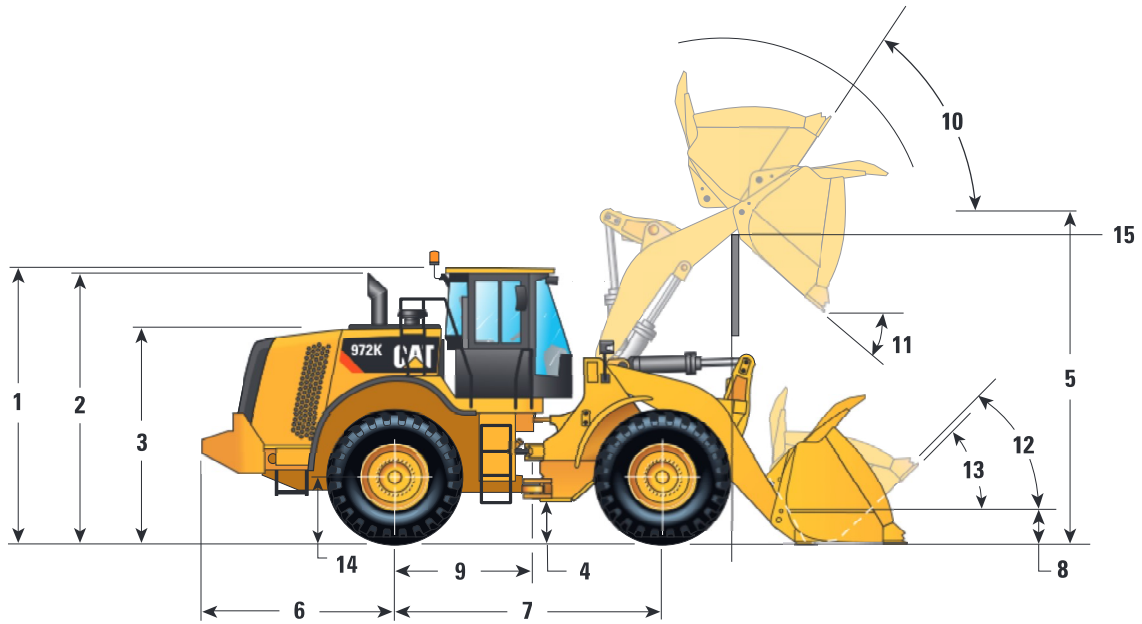

|  |            |       |
|--|------------|-------|
| <b>1</b> Height to Top of ROPS   | 3547 mm    | 11'7" |
| <b>2</b> Height to Top of Exhaust Pipe   | 3518 mm    | 11'6" |
| <b>3</b> Height to Top of Hood   | 2828 mm    | 9'3"  |
| <b>4</b> Ground Clearance with 26.5R25 (See Tire Option Chart for Other Tires) | 475 mm     | 1'6"  |
| <b>5</b> B-Pin Height – Standard   | 4456 mm    | 14'7" |
| B-Pin Height – High Lift   | 4792 mm    | 15'8" |
| <b>6</b> Center Line of Rear Axle to Edge of Counterweight                     | 2473 mm    | 8'1"  |
| <b>7</b> Wheelbase   | 3450 mm    | 11'3" |
| <b>8</b> B-Pin Height @ Carry – Standard                                       | 689 mm     | 2'3"  |
| <b>9</b> Center Line of Rear Axle to Hitch                                     | 1725 mm    | 5'7"  |
| <b>10</b> Rack Back @ Maximum Lift   | 56 degrees |       |
| <b>11</b> Dump Angle @ Maximum Lift  | 48 degrees |       |
| <b>12</b> Rack Back @ Carry  | 50 degrees |       |
| <b>13</b> Rack Back @ Ground   | 41 degrees |       |
| <b>14</b> Height to Center Line of Axle  | 798 mm     | 2'7"  |
| <b>15</b> Lift Arm Clearance   | 3804 mm    | 12'6" |
| Lift Arm Clearance @ High Lift   | 4153 mm    | 13'6" |



## Operating Specifications

| Bucket Type   |                 | General Purpose – Pin On |                    |        |               |                    |        |
|---|-----------------|--------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges            | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.20                     | 4.20               | 4.00   | 4.40          | 4.40               | 4.20   |
|   | yd <sup>3</sup> | 5.49                     | 5.49               | 5.23   | 5.75          | 5.75               | 5.49   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 3.70                     | 3.70               | 3.50   | 3.80          | 3.80               | 3.60   |
|   | yd <sup>3</sup> | 4.84                     | 4.84               | 4.58   | 4.97          | 4.97               | 4.71   |
| Width (§)   | mm              | 3220                     | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                    | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3225                     | 3071               | 3071   | 3229          | 3076               | 3076   |
|   | ft/in           | 10'6"                    | 10'0"              | 10'0"  | 10'7"         | 10'1"              | 10'1"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1332                     | 1470               | 1470   | 1327          | 1465               | 1465   |
|   | ft/in           | 4'4"                     | 4'9"               | 4'9"   | 4'4"          | 4'9"               | 4'9"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 2955                     | 3160               | 3160   | 2948          | 3153               | 3153   |
|   | ft/in           | 9'8"                     | 10'4"              | 10'4"  | 9'8"          | 10'4"              | 10'4"  |
| Digging Depth (§)   | mm              | 103                      | 103                | 73     | 103           | 103                | 73     |
|   | ft/in           | 4"                       | 4"                 | 2.8"   | 4"            | 4"                 | 2.8"   |
| Overall Length  | mm              | 9129                     | 9353               | 9353   | 9122          | 9346               | 9346   |
|   | ft/in           | 30'0"                    | 30'9"              | 30'9"  | 30'0"         | 30'8"              | 30'8"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 5937                     | 5937               | 5937   | 6230          | 6230               | 6230   |
|   | ft/in           | 19'6"                    | 19'6"              | 19'6"  | 20'6"         | 20'6"              | 20'6"  |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 925                   | 15 104             | 15 104 | 14 921        | 15 100             | 15 100 |
|   | ft/in           | 49'0"                    | 49'7"              | 49'7"  | 49'0"         | 49'7"              | 49'7"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 18 770                   | 18 589             | 18 840 | 18 817        | 18 636             | 18 885 |
|   | lb              | 41,371                   | 40,971             | 41,523 | 41,474        | 41,074             | 41,622 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 20 088                   | 19 903             | 20 157 | 20 147        | 19 962             | 20 215 |
|   | lb              | 44,274                   | 43,866             | 44,427 | 44,405        | 43,996             | 44,554 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 16 396                   | 16 213             | 16 447 | 16 437        | 16 253             | 16 485 |
|   | lb              | 36,138                   | 35,734             | 36,251 | 36,227        | 35,822             | 36,334 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 17 706                   | 17 521             | 17 757 | 17 758        | 17 573             | 17 807 |
|   | lb              | 39,024                   | 38,616             | 39,138 | 39,140        | 38,731             | 39,248 |
| Breakout Force** (§)                                      | kN              | 210                      | 208                | 223    | 211           | 209                | 224    |
|   | lb              | 47,189                   | 46,880             | 50,138 | 47,419        | 47,109             | 50,397 |
| Operating Weight*   | kg              | 26 223                   | 26 361             | 26 198 | 26 229        | 26 367             | 26 203 |
|   | lb              | 57,795                   | 58,099             | 57,740 | 57,807        | 58,111             | 57,752 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.

# 972K Wheel Loader Specifications

## Operating Specifications

| Bucket Type   |                 | General Purpose – Pin On |                    |        |               |                    |        |
|---|-----------------|--------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges            | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.60                     | 4.60               | 4.40   | 4.80          | 4.80               | 4.60   |
|   | yd <sup>3</sup> | 6.02                     | 6.02               | 5.75   | 6.28          | 6.28               | 6.02   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 4.00                     | 4.00               | 3.80   | 4.10          | 4.10               | 3.90   |
|   | yd <sup>3</sup> | 5.23                     | 5.23               | 4.97   | 5.36          | 5.36               | 5.10   |
| Width (§)   | mm              | 3220                     | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                    | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3187                     | 3033               | 3033   | 3154          | 2999               | 2999   |
|   | ft/in           | 10'5"                    | 9'11"              | 9'11"  | 10'4"         | 9'10"              | 9'10"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1363                     | 1500               | 1500   | 1392          | 1528               | 1528   |
|   | ft/in           | 4'5"                     | 4'11"              | 4'11"  | 4'6"          | 5'0"               | 5'0"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 3004                     | 3209               | 3209   | 3049          | 3254               | 3254   |
|   | ft/in           | 9'10"                    | 10'6"              | 10'6"  | 10'0"         | 10'8"              | 10'8"  |
| Digging Depth (§)   | mm              | 103                      | 103                | 73     | 103           | 103                | 73     |
|   | ft/in           | 4"                       | 4"                 | 2.8"   | 4"            | 4"                 | 2.8"   |
| Overall Length  | mm              | 9178                     | 9402               | 9402   | 9223          | 9447               | 9447   |
|   | ft/in           | 30'2"                    | 30'11"             | 30'11" | 30'4"         | 31'0"              | 31'0"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6195                     | 6195               | 6195   | 6031          | 6031               | 6031   |
|   | ft/in           | 20'4"                    | 20'4"              | 20'4"  | 19'10"        | 19'10"             | 19'10" |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 951                   | 15 132             | 15 132 | 14 976        | 15 157             | 15 157 |
|   | ft/in           | 49'1"                    | 49'8"              | 49'8"  | 49'2"         | 49'9"              | 49'9"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 18 658                   | 18 476             | 18 733 | 18 683        | 18 500             | 20 705 |
|   | lb              | 41,124                   | 40,722             | 41,288 | 41,179        | 40,775             | 45,634 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 19 985                   | 19 799             | 20 059 | 20 017        | 19 830             | 22 448 |
|   | lb              | 44,048                   | 43,638             | 44,210 | 44,118        | 43,705             | 49,475 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 16 289                   | 16 104             | 16 343 | 16 317        | 16 132             | 18 062 |
|   | lb              | 35,901                   | 35,494             | 36,021 | 35,963        | 35,554             | 39,810 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 17 608                   | 17 422             | 17 662 | 17 642        | 17 455             | 19 773 |
|   | lb              | 38,808                   | 38,398             | 38,927 | 38,884        | 38,471             | 43,580 |
| Breakout Force** (§)                                      | kN              | 202                      | 201                | 214    | 196           | 194                | 207    |
|   | lb              | 45,482                   | 45,173             | 48,227 | 44,075        | 43,766             | 46,655 |
| Operating Weight*   | kg              | 26 284                   | 26 422             | 26 258 | 26 212        | 26 350             | 26 186 |
|   | lb              | 57,929                   | 58,233             | 57,873 | 57,770        | 58,074             | 57,714 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.



## Operating Specifications

| Bucket Type   | General Purpose – Pin On |               |                    | General Purpose – Fusion QC |               |                    |        |
|---|--------------------------|---------------|--------------------|-----------------------------|---------------|--------------------|--------|
|   | Edge Type                | Bolt-On Edges | Teeth and Segments | Teeth                       | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>           | 5.00          | 5.00               | 4.80                        | 4.20          | 4.20               | 4.00   |
|   | yd <sup>3</sup>          | 6.54          | 6.54               | 6.28                        | 5.49          | 5.49               | 5.23   |
| Capacity – Struck (§)                                     | m <sup>3</sup>           | 4.30          | 4.30               | 4.10                        | 3.70          | 3.70               | 3.50   |
|   | yd <sup>3</sup>          | 5.62          | 5.62               | 5.36                        | 4.84          | 4.84               | 4.58   |
| Width (§)   | mm                       | 3220          | 3271               | 3271                        | 3220          | 3271               | 3271   |
|   | ft/in                    | 10'6"         | 10'8"              | 10'8"                       | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm                       | 3137          | 2982               | 2982                        | 3195          | 3041               | 3041   |
|   | ft/in                    | 10'3"         | 9'9"               | 9'9"                        | 10'5"         | 9'11"              | 9'11"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm                       | 1407          | 1543               | 1543                        | 1367          | 1504               | 1504   |
|   | ft/in                    | 4'7"          | 5'0"               | 5'0"                        | 4'5"          | 4'11"              | 4'11"  |
| Reach at Level Lift Arm and Bucket Level (§)              | mm                       | 3072          | 3277               | 3277                        | 3000          | 3205               | 3205   |
|   | ft/in                    | 10'0"         | 10'9"              | 10'9"                       | 9'10"         | 10'6"              | 10'6"  |
| Digging Depth (§)   | mm                       | 103           | 103                | 73                          | 103           | 103                | 73     |
|   | ft/in                    | 4"            | 4"                 | 2.8"                        | 4"            | 4"                 | 2.8"   |
| Overall Length  | mm                       | 9246          | 9470               | 9470                        | 9175          | 9398               | 9398   |
|   | ft/in                    | 30'4"         | 31'1"              | 31'1"                       | 30'2"         | 30'10"             | 30'10" |
| Overall Height with Bucket at Maximum Lift                | mm                       | 6284          | 6284               | 6284                        | 6036          | 6036               | 6036   |
|   | ft/in                    | 20'8"         | 20'8"              | 20'8"                       | 19'10"        | 19'10"             | 19'10" |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm                       | 14 989        | 15 170             | 15 170                      | 14 944        | 15 126             | 15 126 |
|   | ft/in                    | 49'3"         | 49'10"             | 49'10"                      | 49'1"         | 49'8"              | 49'8"  |
| Static Tipping Load, Straight (ISO)*                      | kg                       | 18 779        | 18 595             | 18 832                      | 18 260        | 18 079             | 18 430 |
|   | lb                       | 41,390        | 40,984             | 41,507                      | 40,246        | 39,848             | 40,621 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg                       | 20 115        | 19 927             | 20 166                      | 19 563        | 19 379             | 19 746 |
|   | lb                       | 44,334        | 43,919             | 44,447                      | 43,118        | 42,711             | 43,520 |
| Static Tipping Load, Articulated (ISO)*                   | kg                       | 16 414        | 16 228             | 16 449                      | 15 906        | 15 723             | 16 058 |
|   | lb                       | 36,177        | 35,767             | 36,254                      | 35,057        | 34,653             | 35,393 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg                       | 17 739        | 17 551             | 17 772                      | 17 205        | 17 020             | 17 369 |
|   | lb                       | 39,097        | 38,683             | 39,171                      | 37,920        | 37,513             | 38,282 |
| Breakout Force** (§)                                      | kN                       | 198           | 197                | 210                         | 203           | 201                | 215    |
|   | lb                       | 44,634        | 44,325             | 47,205                      | 45,615        | 45,306             | 48,375 |
| Operating Weight*   | kg                       | 26 325        | 26 463             | 26 299                      | 26 600        | 26 738             | 26 574 |
|   | lb                       | 58,019        | 58,323             | 57,963                      | 58,625        | 58,929             | 58,569 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.

# 972K Wheel Loader Specifications

## Operating Specifications

| Bucket Type   |                 | General Purpose – Fusion QC |                    |        |               |                    |        |
|---|-----------------|-----------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges               | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.40                        | 4.40               | 4.20   | 4.60          | 4.60               | 4.40   |
|   | yd <sup>3</sup> | 5.75                        | 5.75               | 5.49   | 6.02          | 6.02               | 5.75   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 3.80                        | 3.80               | 3.60   | 4.00          | 4.00               | 3.80   |
|   | yd <sup>3</sup> | 4.97                        | 4.97               | 4.71   | 5.23          | 5.23               | 4.97   |
| Width (§)   | mm              | 3220                        | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                       | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3200                        | 3047               | 3047   | 3157          | 3003               | 3003   |
|   | ft/in           | 10'6"                       | 9'11"              | 9'11"  | 10'4"         | 9'10"              | 9'10"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1362                        | 1500               | 1500   | 1397          | 1535               | 1535   |
|   | ft/in           | 4'5"                        | 4'11"              | 4'11"  | 4'7"          | 5'0"               | 5'0"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 2993                        | 3198               | 3198   | 3050          | 3255               | 3255   |
|   | ft/in           | 9'9"                        | 10'5"              | 10'5"  | 10'0"         | 10'8"              | 10'8"  |
| Digging Depth (§)   | mm              | 103                         | 103                | 73     | 103           | 103                | 73     |
|   | ft/in           | 4"                          | 4"                 | 2.8"   | 4"            | 4"                 | 2.8"   |
| Overall Length  | mm              | 9167                        | 9391               | 9391   | 9224          | 9448               | 9448   |
|   | ft/in           | 30'1"                       | 30'10"             | 30'10" | 30'4"         | 31'0"              | 31'0"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6205                        | 6205               | 6205   | 6211          | 6211               | 6211   |
|   | ft/in           | 20'5"                       | 20'5"              | 20'5"  | 20'5"         | 20'5"              | 20'5"  |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 940                      | 15 122             | 15 122 | 14 971        | 15 154             | 15 154 |
|   | ft/in           | 49'1"                       | 49'8"              | 49'8"  | 49'2"         | 49'9"              | 49'9"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 18 263                      | 18 082             | 18 439 | 18 113        | 17 931             | 18 282 |
|   | lb              | 40,252                      | 39,853             | 40,639 | 39,921        | 39,520             | 40,293 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 19 578                      | 19 393             | 19 767 | 19 425        | 19 239             | 19 606 |
|   | lb              | 43,150                      | 42,742             | 43,566 | 42,812        | 42,403             | 43,212 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 15 902                      | 15 719             | 16 060 | 15 761        | 15 577             | 15 912 |
|   | lb              | 35,049                      | 34,645             | 35,396 | 34,738        | 34,332             | 35,072 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 17 213                      | 17 028             | 17 383 | 17 070        | 16 884             | 17 233 |
|   | lb              | 37,937                      | 37,530             | 38,312 | 37,622        | 37,212             | 37,982 |
| Breakout Force** (§)                                      | kN              | 203                         | 202                | 216    | 195           | 194                | 207    |
|   | lb              | 45,788                      | 45,479             | 48,572 | 43,941        | 43,632             | 46,510 |
| Operating Weight*   | kg              | 26 642                      | 26 780             | 26 616 | 26 700        | 26 838             | 26 675 |
|   | lb              | 58,718                      | 59,022             | 58,662 | 58,847        | 59,151             | 58,791 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.



## Operating Specifications

| Bucket Type   |                 | General Purpose – Fusion QC |                    |        |               |                    |        |
|---|-----------------|-----------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges               | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.80                        | 4.80               | 4.60   | 5.00          | 5.00               | 4.80   |
|   | yd <sup>3</sup> | 6.28                        | 6.28               | 6.02   | 6.54          | 6.54               | 6.28   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 4.10                        | 4.10               | 3.90   | 4.30          | 4.30               | 4.10   |
|   | yd <sup>3</sup> | 5.36                        | 5.36               | 5.10   | 5.62          | 5.62               | 5.36   |
| Width (§)   | mm              | 3220                        | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                       | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3130                        | 2975               | 2975   | 3106          | 2951               | 2951   |
|   | ft/in           | 10'3"                       | 9'9"               | 9'9"   | 10'2"         | 9'8"               | 9'8"   |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1419                        | 1555               | 1555   | 1440          | 1576               | 1576   |
|   | ft/in           | 4'7"                        | 5'1"               | 5'1"   | 4'8"          | 5'2"               | 5'2"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 3085                        | 3290               | 3290   | 3117          | 3322               | 3322   |
|   | ft/in           | 10'1"                       | 10'9"              | 10'9"  | 10'2"         | 10'10"             | 10'10" |
| Digging Depth (§)   | mm              | 103                         | 103                | 73     | 103           | 103                | 73     |
|   | ft/in           | 4"                          | 4"                 | 2.8"   | 4"            | 4"                 | 2.8"   |
| Overall Length  | mm              | 9259                        | 9483               | 9483   | 9291          | 9515               | 9515   |
|   | ft/in           | 30'5"                       | 31'2"              | 31'2"  | 30'6"         | 31'3"              | 31'3"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6270                        | 6270               | 6270   | 6296          | 6296               | 6296   |
|   | ft/in           | 20'7"                       | 20'7"              | 20'7"  | 20'8"         | 20'8"              | 20'8"  |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 991                      | 15 174             | 15 174 | 15 009        | 15 193             | 15 193 |
|   | ft/in           | 49'3"                       | 49'10"             | 49'10" | 49'3"         | 49'11"             | 49'11" |
| Static Tipping Load, Straight (ISO)*                      | kg              | 18 105                      | 17 922             | 18 271 | 17 986        | 17 802             | 18 150 |
|   | lb              | 39,903                      | 39,500             | 40,270 | 39,642        | 39,237             | 40,003 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 19 423                      | 19 236             | 19 602 | 19 306        | 19 119             | 19 483 |
|   | lb              | 42,808                      | 42,396             | 43,203 | 42,552        | 42,138             | 42,941 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 15 754                      | 15 569             | 15 903 | 15 636        | 15 450             | 15 783 |
|   | lb              | 34,722                      | 34,314             | 35,051 | 34,462        | 34,052             | 34,786 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 17 068                      | 16 881             | 17 230 | 16 953        | 16 766             | 17 112 |
|   | lb              | 37,619                      | 37,207             | 37,975 | 37,366        | 36,952             | 37,716 |
| Breakout Force** (§)                                      | kN              | 190                         | 189                | 201    | 186           | 185                | 196    |
|   | lb              | 42,897                      | 42,588             | 45,348 | 41,881        | 41,572             | 44,224 |
| Operating Weight*   | kg              | 26 695                      | 26 833             | 26 670 | 26 786        | 26 924             | 26 761 |
|   | lb              | 58,836                      | 59,140             | 58,780 | 59,036        | 59,340             | 58,980 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.

# 972K Wheel Loader Specifications

## Operating Specifications

| Bucket Type   |                 | Material Handling – Pin On |                    |        | Rock – Pin On*** |                    |        |
|---|-----------------|----------------------------|--------------------|--------|------------------|--------------------|--------|
|   |                 | Bolt-On Edges              | Teeth and Segments | Teeth  | Bolt-On Edges    | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.60                       | 4.60               | 4.40   | 3.60             | 3.60               | 3.40   |
|   | yd <sup>3</sup> | 6.02                       | 6.02               | 5.75   | 4.71             | 4.71               | 4.45   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 3.90                       | 3.90               | 3.70   | 3.10             | 3.10               | 2.90   |
|   | yd <sup>3</sup> | 5.10                       | 5.10               | 4.84   | 4.05             | 4.05               | 3.79   |
| Width (§)   | mm              | 3220                       | 3271               | 3271   | 3252             | 3252               | 3252   |
|   | ft/in           | 10'6"                      | 10'8"              | 10'8"  | 10'8"            | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3120                       | 2957               | 2957   | 3336             | 3248               | 3248   |
|   | ft/in           | 10'2"                      | 9'8"               | 9'8"   | 10'11"           | 10'7"              | 10'7"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1286                       | 1413               | 1413   | 1420             | 1528               | 1528   |
|   | ft/in           | 4'2"                       | 4'7"               | 4'7"   | 4'7"             | 5'0"               | 5'0"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 3014                       | 3219               | 3219   | 2964             | 3104               | 3104   |
|   | ft/in           | 9'10"                      | 10'6"              | 10'6"  | 9'8"             | 10'2"              | 10'2"  |
| Digging Depth (§)   | mm              | 103                        | 103                | 73     | 44               | 44                 | 4      |
|   | ft/in           | 4"                         | 4"                 | 2.8"   | 1.7"             | 1.7"               | 0.1"   |
| Overall Length  | mm              | 9188                       | 9412               | 9412   | 9127             | 9272               | 9272   |
|   | ft/in           | 30'2"                      | 30'11"             | 30'11" | 30'0"            | 30'6"              | 30'6"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6162                       | 6162               | 6162   | 6042             | 6042               | 6042   |
|   | ft/in           | 20'3"                      | 20'3"              | 20'3"  | 19'10"           | 19'10"             | 19'10" |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 957                     | 15 137             | 15 137 | 14 978           | 15 061             | 15 061 |
|   | ft/in           | 49'1"                      | 49'8"              | 49'8"  | 49'2"            | 49'5"              | 49'5"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 18 595                     | 18 413             | 18 653 | 19 302           | 19 235             | 19 616 |
|   | lb              | 40,983                     | 40,582             | 41,111 | 42,543           | 42,394             | 43,234 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 19 901                     | 19 715             | 19 958 | 20 641           | 20 572             | 20 963 |
|   | lb              | 43,862                     | 43,453             | 43,988 | 45,494           | 45,342             | 46,202 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 16 235                     | 16 051             | 16 274 | 16 872           | 16 804             | 17 167 |
|   | lb              | 35,782                     | 35,376             | 35,869 | 37,187           | 37,036             | 37,837 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 17 534                     | 17 349             | 17 573 | 18 203           | 18 134             | 18 504 |
|   | lb              | 38,646                     | 38,237             | 38,732 | 40,120           | 39,968             | 40,783 |
| Breakout Force** (§)                                      | kN              | 201                        | 199                | 213    | 222              | 222                | 231    |
|   | lb              | 45,174                     | 44,865             | 47,882 | 50,090           | 49,982             | 52,114 |
| Operating Weight*   | kg              | 26 279                     | 26 417             | 26 253 | 26 934           | 26 985             | 26 760 |
|   | lb              | 57,918                     | 58,222             | 57,862 | 59,361           | 59,473             | 58,977 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.



## Operating Specifications

| Bucket Type   |                 | Rock – Pin On*** |                    |        | Rock – Fusion QC*** |                    |        |
|---|-----------------|------------------|--------------------|--------|---------------------|--------------------|--------|
|   |                 | Bolt-On Edges    | Teeth and Segments | Teeth  | Bolt-On Edges       | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.00             | 4.00               | 3.80   | 3.60                | 3.60               | 3.40   |
|   | yd <sup>3</sup> | 5.23             | 5.23               | 4.97   | 4.71                | 4.71               | 4.45   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 3.50             | 3.50               | 3.30   | 3.10                | 3.10               | 2.90   |
|   | yd <sup>3</sup> | 4.58             | 4.58               | 4.32   | 4.05                | 4.05               | 3.79   |
| Width (§)   | mm              | 3252             | 3252               | 3252   | 3252                | 3252               | 3252   |
|   | ft/in           | 10'8"            | 10'8"              | 10'8"  | 10'8"               | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 3233             | 3142               | 3142   | 3310                | 3222               | 3222   |
|   | ft/in           | 10'7"            | 10'3"              | 10'3"  | 10'10"              | 10'6"              | 10'6"  |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1463             | 1571               | 1571   | 1455                | 1563               | 1563   |
|   | ft/in           | 4'9"             | 5'1"               | 5'1"   | 4'9"                | 5'1"               | 5'1"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 3073             | 3214               | 3214   | 3008                | 3147               | 3147   |
|   | ft/in           | 10'1"            | 10'6"              | 10'6"  | 9'10"               | 10'3"              | 10'3"  |
| Digging Depth (§)   | mm              | 44               | 44                 | 44     | 44                  | 44                 | 4      |
|   | ft/in           | 1.7"             | 1.7"               | 1.7"   | 1.7"                | 1.7"               | 0.1"   |
| Overall Length  | mm              | 9236             | 9380               | 9380   | 9171                | 9315               | 9315   |
|   | ft/in           | 30'4"            | 30'10"             | 30'10" | 30'2"               | 30'7"              | 30'7"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6159             | 6159               | 6159   | 6060                | 6060               | 6060   |
|   | ft/in           | 20'3"            | 20'3"              | 20'3"  | 19'11"              | 19'11"             | 19'11" |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 15 039           | 15 123             | 15 123 | 14 996              | 15 081             | 15 081 |
|   | ft/in           | 49'5"            | 49'8"              | 49'8"  | 49'3"               | 49'6"              | 49'6"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 19 183           | 19 114             | 19 459 | 18 779              | 18 710             | 19 158 |
|   | lb              | 42,281           | 42,128             | 42,887 | 41,390              | 41,238             | 42,225 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 20 544           | 20 474             | 20 829 | 20 105              | 20 035             | 20 500 |
|   | lb              | 45,281           | 45,125             | 45,907 | 44,312              | 44,157             | 45,184 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 16 744           | 16 674             | 17 016 | 16 368              | 16 299             | 16 730 |
|   | lb              | 36,905           | 36,750             | 37,503 | 36,076              | 35,923             | 36,873 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 18 098           | 18 027             | 18 376 | 17 690              | 17 620             | 18 065 |
|   | lb              | 39,889           | 39,733             | 40,501 | 38,990              | 38,835             | 39,816 |
| Breakout Force** (§)                                      | kN              | 204              | 204                | 212    | 215                 | 214                | 223    |
|   | lb              | 45,999           | 45,886             | 47,764 | 48,357              | 48,247             | 50,268 |
| Operating Weight*   | kg              | 27 081           | 27 132             | 26 907 | 27 326              | 27 378             | 27 153 |
|   | lb              | 59,685           | 59,797             | 59,301 | 60,225              | 60,339             | 59,844 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.

# 972K Wheel Loader Specifications

## Operating Specifications

| Bucket Type   |                 | Coal – Pin On | Coal – Fusion QC | High Lift Change in Specs |
|---|-----------------|---------------|------------------|---------------------------|
| Edge Type   |                 | Bolt-On Edges | Bolt-On Edges    |                           |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 7.10          | 7.10             |                           |
|   | yd <sup>3</sup> | 9.29          | 9.29             |                           |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 6.20          | 6.20             |                           |
|   | yd <sup>3</sup> | 8.11          | 8.11             |                           |
| Width (§)   | mm              | 3447          | 3447             |                           |
|   | ft/in           | 11'3"         | 11'3"            |                           |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 2842          | 2819             | 335                       |
|   | ft/in           | 9'3"          | 9'2"             | 1'1"                      |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1544          | 1584             | 23                        |
|   | ft/in           | 5'0"          | 5'2"             | 1"                        |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 3393          | 3438             | 273                       |
|   | ft/in           | 11'1"         | 11'3"            | 0'10"                     |
| Digging Depth (§)   | mm              | 117           | 105              | -4                        |
|   | ft/in           | 4.6"          | 4.1"             | -0.1"                     |
| Overall Length  | mm              | 9578          | 9614             | 336                       |
|   | ft/in           | 31'6"         | 31'7"            | 1'2"                      |
| Overall Height with Bucket at Maximum Lift                | mm              | 6546          | 6581             | 336                       |
|   | ft/in           | 21'6"         | 21'8"            | 1'2"                      |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 15 385        | 15 401           | 332                       |
|   | ft/in           | 50'6"         | 50'7"            | 1'2"                      |
| Static Tipping Load, Straight (ISO)*                      | kg              | 17 394        | 16 779           | -1558                     |
|   | lb              | 38,337        | 36,983           | -3,434                    |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 18 728        | 18 106           | -1721                     |
|   | lb              | 41,277        | 39,906           | -3,794                    |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 15 072        | 14 465           | -1391                     |
|   | lb              | 33,220        | 31,882           | -3,066                    |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 16 407        | 15 797           | -1568                     |
|   | lb              | 36,161        | 34,817           | -3,457                    |
| Breakout Force** (§)                                      | kN              | 154           | 149              | -5                        |
|   | lb              | 34,604        | 33,479           | -1,327                    |
| Operating Weight*   | kg              | 26 946        | 27 506           | 85                        |
|   | lb              | 59,387        | 60,622           | 186                       |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.



## Extended Capacity Operating Specifications

| Bucket Type   |                 | General Purpose – Pin On |                    |        |               |                    |        |
|---|-----------------|--------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges            | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.60                     | 4.60               | 4.40   | 4.90          | 4.90               | 4.70   |
|   | yd <sup>3</sup> | 6.02                     | 6.02               | 5.75   | 6.41          | 6.41               | 6.15   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 4.05                     | 4.05               | 3.90   | 4.20          | 4.20               | 4.00   |
|   | yd <sup>3</sup> | 5.30                     | 5.30               | 5.10   | 5.49          | 5.49               | 5.23   |
| Width (§)   | mm              | 3220                     | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                    | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 2978                     | 2824               | 2824   | 2920          | 2765               | 2765   |
|   | ft/in           | 9'9"                     | 9'3"               | 9'3"   | 9'6"          | 9'0"               | 9'0"   |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1400                     | 1537               | 1537   | 1448          | 1584               | 1584   |
|   | ft/in           | 4'7"                     | 5'0"               | 5'0"   | 4'9"          | 5'2"               | 5'2"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 2857                     | 3062               | 3062   | 2933          | 3138               | 3138   |
|   | ft/in           | 9'4"                     | 10'0"              | 10'0"  | 9'7"          | 10'3"              | 10'3"  |
| Digging Depth (§)   | mm              | 123                      | 123                | 93     | 123           | 123                | 93     |
|   | ft/in           | 4.8"                     | 4.8"               | 3.6"   | 4.8"          | 4.8"               | 3.6"   |
| Overall Length  | mm              | 8996                     | 9221               | 9221   | 9072          | 9297               | 9297   |
|   | ft/in           | 29'7"                    | 30'4"              | 30'4"  | 29'10"        | 30'7"              | 30'7"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 5875                     | 5875               | 5875   | 6095          | 6095               | 6095   |
|   | ft/in           | 19'4"                    | 19'4"              | 19'4"  | 20'0"         | 20'0"              | 20'0"  |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 787                   | 14 961             | 14 961 | 14 827        | 15 001             | 15 001 |
|   | ft/in           | 48'7"                    | 49'1"              | 49'1"  | 48'8"         | 49'3"              | 49'3"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 20 204                   | 20 021             | 20 388 | 20 052        | 19 867             | 20 098 |
|   | lb              | 44,531                   | 44,127             | 44,936 | 44,194        | 43,787             | 44,296 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 21 762                   | 21 574             | 21 959 | 21 624        | 21 434             | 21 667 |
|   | lb              | 47,964                   | 47,549             | 48,397 | 47,660        | 47,241             | 47,755 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 17 668                   | 17 482             | 17 836 | 17 520        | 17 333             | 17 546 |
|   | lb              | 38,940                   | 38,531             | 39,312 | 38,615        | 38,202             | 38,672 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 19 203                   | 19 015             | 19 384 | 19 071        | 18 881             | 19 094 |
|   | lb              | 42,325                   | 41,910             | 42,722 | 42,032        | 41,614             | 42,085 |
| Breakout Force** (§)                                      | kN              | 215                      | 214                | 228    | 204           | 202                | 215    |
|   | lb              | 48,470                   | 48,095             | 51,358 | 45,923        | 45,550             | 48,516 |
| Operating Weight*   | kg              | 26 062                   | 26 200             | 26 037 | 26 185        | 26 323             | 26 160 |
|   | lb              | 57,440                   | 57,744             | 57,384 | 57,712        | 58,016             | 57,656 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.

# 972K Wheel Loader Specifications

## Extended Capacity Operating Specifications

| Bucket Type   |                 | General Purpose – Fusion QC |                    |        |               |                    |        |
|---|-----------------|-----------------------------|--------------------|--------|---------------|--------------------|--------|
|   |                 | Bolt-On Edges               | Teeth and Segments | Teeth  | Bolt-On Edges | Teeth and Segments | Teeth  |
| Capacity – Rated (§)                                      | m <sup>3</sup>  | 4.60                        | 4.60               | 4.40   | 4.90          | 4.90               | 4.70   |
|   | yd <sup>3</sup> | 6.02                        | 6.02               | 5.75   | 6.41          | 6.41               | 6.15   |
| Capacity – Struck (§)                                     | m <sup>3</sup>  | 4.05                        | 4.05               | 3.90   | 4.20          | 4.20               | 4.00   |
|   | yd <sup>3</sup> | 5.30                        | 5.30               | 5.10   | 5.49          | 5.49               | 5.23   |
| Width (§)   | mm              | 3220                        | 3271               | 3271   | 3220          | 3271               | 3271   |
|   | ft/in           | 10'6"                       | 10'8"              | 10'8"  | 10'6"         | 10'8"              | 10'8"  |
| Dump Clearance at Maximum Lift and 45° Discharge (§)      | mm              | 2948                        | 2794               | 2794   | 2899          | 2744               | 2744   |
|   | ft/in           | 9'8"                        | 9'2"               | 9'2"   | 9'6"          | 9'0"               | 9'0"   |
| Reach at Maximum Lift and 45° Discharge (§)               | mm              | 1436                        | 1573               | 1573   | 1484          | 1621               | 1621   |
|   | ft/in           | 4'8"                        | 5'1"               | 5'1"   | 4'10"         | 5'3"               | 5'3"   |
| Reach at Level Lift Arm and Bucket Level (§)              | mm              | 2903                        | 3108               | 3108   | 2975          | 3180               | 3180   |
|   | ft/in           | 9'6"                        | 10'2"              | 10'2"  | 9'9"          | 10'5"              | 10'5"  |
| Digging Depth (§)   | mm              | 122                         | 122                | 92     | 115           | 115                | 85     |
|   | ft/in           | 4.8"                        | 4.8"               | 3.6"   | 4.5"          | 4.5"               | 3.3"   |
| Overall Length  | mm              | 9041                        | 9267               | 9267   | 9108          | 9333               | 9333   |
|   | ft/in           | 29'8"                       | 30'5"              | 30'5"  | 29'11"        | 30'8"              | 30'8"  |
| Overall Height with Bucket at Maximum Lift                | mm              | 6039                        | 6039               | 6039   | 6126          | 6126               | 6126   |
|   | ft/in           | 19'10"                      | 19'10"             | 19'10" | 20'2"         | 20'2"              | 20'2"  |
| Loader Clearance Circle with Bucket at Carry Position (§) | mm              | 14 804                      | 14 981             | 14 981 | 14 837        | 15 015             | 15 015 |
|   | ft/in           | 48'7"                       | 49'2"              | 49'2"  | 48'9"         | 49'4"              | 49'4"  |
| Static Tipping Load, Straight (ISO)*                      | kg              | 19 674                      | 19 491             | 19 844 | 19 574        | 19 389             | 19 752 |
|   | lb              | 43,362                      | 42,959             | 43,738 | 43,141        | 42,734             | 43,534 |
| Static Tipping Load, Straight (Rigid Tire)*               | kg              | 21 217                      | 21 029             | 21 404 | 21 141        | 20 952             | 21 335 |
|   | lb              | 46,763                      | 46,350             | 47,176 | 46,596        | 46,178             | 47,023 |
| Static Tipping Load, Articulated (ISO)*                   | kg              | 17 155                      | 16 969             | 17 308 | 17 052        | 16 865             | 17 213 |
|   | lb              | 37,809                      | 37,400             | 38,147 | 37,584        | 37,171             | 37,937 |
| Static Tipping Load, Articulated (Rigid Tire)*            | kg              | 18 681                      | 18 493             | 18 850 | 18 603        | 18 413             | 18 777 |
|   | lb              | 41,173                      | 40,759             | 41,545 | 41,001        | 40,583             | 41,385 |
| Breakout Force** (§)                                      | kN              | 208                         | 207                | 220    | 198           | 196                | 209    |
|   | lb              | 46,886                      | 46,513             | 49,589 | 44,570        | 44,204             | 47,022 |
| Operating Weight*   | kg              | 26 508                      | 26 646             | 26 483 | 26 598        | 26 736             | 26 573 |
|   | lb              | 58,424                      | 58,728             | 58,368 | 58,622        | 58,926             | 58,567 |

\* Static tipping loads and operating weights shown are based on a machine configuration with Michelin 26.5R25 XHA2 L3 Radial tires, full fluids, operator, standard counterweight, cold start, roading fenders, Product Link, open differential axles (front/rear), power train guard, secondary steering, and sound suppression.

\*\* Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

\*\*\* Rock bucket specifications are given on Michelin 26.5R25 XLDD2 L5 Radial tires.

(§) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

(ISO) Full compliance to ISO 14397-1 (2007) Sections 1 thru 6, which requires 2% verification between calculations and testing.

(Rigid Tire) Compliance to ISO 14397-1 (2007) Sections 1 thru 5.



# Bucket Selection Chart

| Material Density                            |  | kg/m <sup>3</sup>                           | 700   | 800  | 900   | 1000  | 1100  | 1200  | 1300  | 1400  | 1500  | 1600  | 1700  | 1800  | 1900  | 2000  | 2100  | 2200  | 2300  | 2400  | 2500  |   |   |   |
|---|--|---|---|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|---|---|-------|-------|-------|-------|---|---|---|---|
| Standard Linkage                            | Pin On                                       | General Purpose                             | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       | 4.83 m <sup>3</sup> (6.32 yd <sup>3</sup> ) |   |   |       |       |       |       | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |   |   |   |
|   |  |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       | 5.06 m <sup>3</sup> (6.62 yd <sup>3</sup> ) |   |   |       |       |       |       |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |   |   |
|   |  |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |   |       |       |       |       |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |   |
|   |  |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   | 5.52 m <sup>3</sup> (7.22 yd <sup>3</sup> ) |   |       |       |       |       |   |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> ) |   |
|   |  |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   | 5.75 m <sup>3</sup> (7.52 yd <sup>3</sup> ) |   |       |       |       |       |   |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> ) |   |
|   |  | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |   |  |       |       |       |       |       |       |       |       |       | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |   |   |       |       |       |       |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |   |   |
|   | Fusion OC                                    | Rock  | 3.60 m <sup>3</sup> (4.71 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   | 4.14 m <sup>3</sup> (5.42 yd <sup>3</sup> ) |   |       |       |       |       |   |   | 3.42 m <sup>3</sup> (4.47 yd <sup>3</sup> ) |   |
|   |  |   | 4.00 m <sup>3</sup> (5.23 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |   |       |       |       |       |   |   | 3.80 m <sup>3</sup> (4.97 yd <sup>3</sup> ) |   |
|   |  |   | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) | 8.17 m <sup>3</sup> (10.69 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |   |   |   |       |       |       |       |   |   |   | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) |
|   |  | General Purpose                             | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   |   | 4.83 m <sup>3</sup> (6.32 yd <sup>3</sup> ) |       |       |       |       |   |   |   | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |
|   |  |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   |   | 5.06 m <sup>3</sup> (6.62 yd <sup>3</sup> ) |       |       |       |       |   |   |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |
|   |  |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |   |   | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |       |       |       |       |   |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |
| Coal  | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> )  |   |   |  |       |       |       |       |       |       |       |       |       | 5.52 m <sup>3</sup> (7.22 yd <sup>3</sup> ) |   |   |       |       |       |       |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> ) |   |   |
|   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> )  |   |   |  |       |       |       |       |       |       |       |       |       | 5.75 m <sup>3</sup> (7.52 yd <sup>3</sup> ) |   |   |       |       |       |       |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> ) |   |   |
|   | 3.60 m <sup>3</sup> (4.71 yd <sup>3</sup> )  |   |   |  |       |       |       |       |       |       |       |       |       | 4.14 m <sup>3</sup> (5.42 yd <sup>3</sup> ) |   |   |       |       |       |       |   | 3.42 m <sup>3</sup> (4.47 yd <sup>3</sup> ) |   |   |
| 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) | 8.17 m <sup>3</sup> (10.69 yd <sup>3</sup> ) |   |   |  |       |       |       |       |       |       |       |       |       |   |   |   |       |       |       |       |   | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) |   |   |
| Material Density                            | Ib/yd <sup>3</sup>                           | 1,180                                       | 1,348                                       | 1,517  | 1,685 | 1,854 | 2,022 | 2,191 | 2,359 | 2,528 | 2,696 | 2,865 | 3,033 | 3,202                                       | 3,370                                       | 3,539                                       | 3,707 | 3,876 | 4,044 | 4,213 |   |   |   |   |
| Bucket Density                              |  |   |   |  |       |       |       |       |       |       |       |       |       |   |   |   |       |       |       |       |   |   |   |   |

All buckets are showing Bolt-On Edges.  
 Material Handling buckets are flat floor buckets.

# 972K Wheel Loader Specifications

## Bucket Selection Chart

| Material Density  |                    | kg/m <sup>3</sup>                           | 700  | 800   | 900   | 1000  | 1100  | 1200  | 1300  | 1400  | 1500  | 1600  | 1700  | 1800  | 1900  | 2000  | 2100  | 2200  | 2300  | 2400  | 2500 |  |   |   |   |   |
|-------------------|--------------------|---|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|---|---|---|-------|-------|-------|------|--|---|---|---|---|
| High Lift Linkage | Pin On             | General Purpose                             | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       | 4.83 m <sup>3</sup> (6.32 yd <sup>3</sup> ) |   |   |   |       |       |       |      |  | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |   |   |   |
|                   |                    |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   | 5.06 m <sup>3</sup> (6.62 yd <sup>3</sup> ) |   |       |       |       |      |  |   |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |   |
|                   |                    |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |
|                   |                    |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.52 m <sup>3</sup> (7.22 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> ) |
|                   |                    |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.75 m <sup>3</sup> (7.52 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> ) |
|                   | Material Handling  | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |       |   |   | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |   |       |       |       |      |  |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |   |
|                   |                    | Rock  | 3.60 m <sup>3</sup> (4.71 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   | 4.14 m <sup>3</sup> (5.42 yd <sup>3</sup> ) |   |       |       |       |      |  |   |   | 3.42 m <sup>3</sup> (4.47 yd <sup>3</sup> ) |   |
|                   |                    |   | 4.00 m <sup>3</sup> (5.23 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 3.80 m <sup>3</sup> (4.97 yd <sup>3</sup> ) |
|                   | Coal               | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) | 8.17 m <sup>3</sup> (10.69 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |   |   |   |   |       |       |       |      |  |   |   | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) |   |
|                   | Fusion OC          | General Purpose                             | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   | 4.83 m <sup>3</sup> (6.32 yd <sup>3</sup> ) |   |       |       |       |      |  |   |   | 4.20 m <sup>3</sup> (5.49 yd <sup>3</sup> ) |   |
|                   |                    |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.06 m <sup>3</sup> (6.62 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 4.40 m <sup>3</sup> (5.75 yd <sup>3</sup> ) |
|                   |                    |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.29 m <sup>3</sup> (6.92 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |
|                   |                    |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.52 m <sup>3</sup> (7.22 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 4.80 m <sup>3</sup> (6.28 yd <sup>3</sup> ) |
|                   |                    |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> )  |       |       |       |       |       |       |       |       |       |       |   |   |   | 5.75 m <sup>3</sup> (7.52 yd <sup>3</sup> ) |       |       |       |      |  |   |   |   | 5.00 m <sup>3</sup> (6.54 yd <sup>3</sup> ) |
| Rock              |                    | 3.60 m <sup>3</sup> (4.71 yd <sup>3</sup> ) |  |       |       |       |       |       |       |       |       |       |       |   | 4.14 m <sup>3</sup> (5.42 yd <sup>3</sup> ) |   |   |       |       |       |      |  |   | 3.42 m <sup>3</sup> (4.47 yd <sup>3</sup> ) |   |   |
| Coal              |                    | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) | 8.17 m <sup>3</sup> (10.69 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |   |   |   |   |       |       |       |      |  |   |   | 7.10 m <sup>3</sup> (9.29 yd <sup>3</sup> ) |   |
| Material Density  | lb/yd <sup>3</sup> | 1,180                                       | 1,348  | 1,517 | 1,685 | 1,854 | 2,022 | 2,191 | 2,359 | 2,528 | 2,696 | 2,865 | 3,033 | 3,202                                       | 3,370                                       | 3,539                                       | 3,707                                       | 3,876 | 4,044 | 4,213 |      |  |   |   |   |   |
| Bucket Density    |                    |   |  |       |       |       |       |       |       |       |       |       |       |   |   |   |   |       |       |       |      |  |   |   |   |   |

All buckets are showing Bolt-On Edges.  
Material Handling buckets are flat floor buckets.



## Bucket Selection Chart

| Material Density          |           | kg/m <sup>3</sup>           | 700   | 800   | 900   | 1000  | 1100  | 1200  | 1300  | 1400  | 1500  | 1600  | 1700  | 1800  | 1900  | 2000  | 2100  | 2200  | 2300  | 2400  | 2500  |
|---------------------------|-----------|-----------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Extended Capacity Linkage | Pin On    | General Purpose             | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                           |           |                             | 4.90 m <sup>3</sup> (6.41 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
| Extended Capacity Linkage | Fusion OC | General Purpose             | 4.60 m <sup>3</sup> (6.02 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                           |           |                             | 4.90 m <sup>3</sup> (6.41 yd <sup>3</sup> ) |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
| Material Density          |           | lb/yd <sup>3</sup>          | 1,180                                       | 1,348 | 1,517 | 1,685 | 1,854 | 2,022 | 2,191 | 2,359 | 2,528 | 2,696 | 2,865 | 3,033 | 3,202 | 3,370 | 3,539 | 3,707 | 3,876 | 4,044 | 4,213 |
| Bucket Density            |           | 115% 110% 105% 100% 95%<br> |   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |

All buckets are showing Bolt-On Edges.  
 Material Handling buckets are flat floor buckets.

## Bucket Fill Factors

(as a % of ISO Rated Capacity)

| Loose Material              | Performance Series Bucket |
|-----------------------------|---------------------------|
| Earth/Clay                  | 115                       |
| Sand and Gravel             | 115                       |
| Aggregate:                  |                           |
| 25-76 mm (1 to 3 in)        | 110                       |
| 19 mm (0.75 in) and smaller | 105                       |
| Rock                        | 100                       |

# 972K Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

## POWER TRAIN

Brakes, full hydraulic enclosed wet-disc with Integrated Braking System (IBS)  
Brake wear indicators  
Diesel Particulate Filter (DPF)  
Engine, Cat 9.3 meets Tier 4 Interim/Stage IIIB emission standards  
Fan, radiator, electronically controlled, hydraulically driven, temperature sensing, on demand  
Fuel Management System (FMS)  
Fuel priming pump (electric)  
Fuel/water separator  
Guard, vandalism  
Precleaner, engine air intake  
Radiator, unit core (6 fpi) with ATAAC  
Switch, transmission neutralizer lockout  
Torque converter, free wheel stator  
Transmission, automatic planetary power shift (4F/4R)  
Variable Shift Control (VSC)

## ELECTRICAL

Alarm, back-up  
Alternator, 150-amp brushless  
Batteries, (2) maintenance free 1,400 CCA  
Ignition key; start/stop switch  
Lighting system:

- Four halogen work lights
- Two halogen roading lights (with signals)
- Two halogen rear vision lights (hood mounted)

Main disconnect switch  
Receptacle start (cables not included)  
Starter, electric, heavy duty  
Starting and charging system (24-volt)

## OPERATOR ENVIRONMENT

Air conditioner, heater, and defroster (auto temp and fan)  
Beverage holders (2) with storage compartment for cell phone/MP3 player  
Bucket/Work Tool function lockout  
Cab, pressurized and sound suppressed, (ROPS/FOPS) radio ready (entertainment) includes antenna, speakers and converter (12-volt 10-amp)  
Camera, rearview  
Coat hook (2)  
EH controls, lift and tilt function  
EH parking brake  
Computerized monitoring system  
Instrumentation, gauges:

- Digital gear range indicator
- DPF soot loading percent
- Engine coolant temperature
- Fuel level
- Hydraulic oil temperature
- Speedometer/tachometer
- Transmission oil temperature

Instrumentation, warning indicators:

- Axle oil temperature
- Battery voltage hi/low
- Engine air filter restriction
- Engine intake manifold temperature
- Engine oil pressure
- Fuel level and pressure hi/low
- Hydraulic oil filter restriction
- Hydraulic oil low
- Parking brake
- Primary steering oil pressure
- Service brake oil pressure
- Transmission filter bypass

Horn, electric  
Light, two dome (cab)  
Mirrors, rearview external (includes spot mirrors)  
Post mounted membrane switch keypads  
Receptacle, 12-volt  
Seat, Cat Comfort (cloth) air suspension  
Seat belt, retractable, 51 mm (2") wide  
Steering, EH joystick, speed sensing with force feedback  
Sun visor, front  
Wet-arm wipers/washers front and rear

- Intermittent front wiper

Window, sliding (left and right sides)  
Viscous mounts

## TIRES

A tire must be selected from the mandatory attachments section. Base machine price includes an allowance.

## FLUIDS

Premixed 50% concentration of Extended Life Coolant with freeze protection to -34° C (-29° F)

## OTHER STANDARD EQUIPMENT

Auto idle shutdown  
Couplings, Cat O-ring face seal  
Ecology drains for engine, transmission, axles, and hydraulics  
Ether aid  
Fenders, steel front with mud-flap/rear with extension  
Filters:

- Fuel, primary/secondary
- Engine air, primary/secondary
- Engine oil
- Hydraulic oil
- Transmission

Fuel cooler  
Grease zerks  
Grill, airborne debris  
Hitch, drawbar with pin  
Hood, non-metallic power tilting with rear clamshell  
Hoses, Cat XT  
Hydraulic oil cooler (swing out)  
Hydraulic system, load sensing  
Kickout, lift and tilt, automatic (adjustable in cab)  
Linkage, Z-bar, cast crosstube/tilt lever  
Oil sampling valves  
Platform, window washing  
Product Link  
Remote diagnostic pressure taps  
Ride control, 2V  
Service center (electrical and hydraulic)  
Sight gauges: engine coolant, hydraulic oil, and transmission oil level  
Steering, load sensing  
Toolbox  
Vandalism protection caplocks

Optional equipment may vary. Consult your Cat dealer for details.

## Power Train

- Differentials
  - Open, front or rear
  - Limited slip, front
  - Limited slip, front and rear
- Extreme temperature seals
- Seal guards
- Axle oil cooler

Hydraulics arrangement, 3 valve

Cold start package (120V)

Comfort package

Work lighting package, halogen

Work lighting package, HID

Industrial package

Steel mill package

Short lift, 2 valve

Short lift, 3 valve

High lift, 2 valve

High lift, 3 valve

Quick coupler

Quick coupler ready, 2V

Quick coupler ready, 3V

Bucket and work tool options (contact Cat Work Tools)

Lights, signal LED

Product Link, satellite

Control, aggregate autodig

Joystick, 2 valve

Joystick, 3 valve

Payload control system

Printer, payload CNTL system

Radio, AM/FM CD/MP3 player

Radio, CB (ready)

Radio, Satellite – XM (Bluetooth capable)

Radio, Satellite – Sirius (Bluetooth capable)

Steering secondary

Filter, carbon fresh air

Seat belt, 76 mm (3") wide

Sun visor, rear

Security system, machine

Cooling, high ambient

Guard, power train

Guard, front window

Guard, complete cab

Guard, front window (Logger)

Autolube

Fenders, roading with fender extensions front/rear

Precleaner, HVAC

Precleaner, turbine

Precleaner, turbine/trash

Oil change system, high speed

Sound suppression (low) NACD

Fan, variable pitch

Antifreeze, –50° C (–58° F)

EH steering wheel (availability TBD)



# 972K Wheel Loader

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2011 Caterpillar Inc.  
All rights reserved

AEHQ6226-01 (07-2011)

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

